



新JIS規格


A種

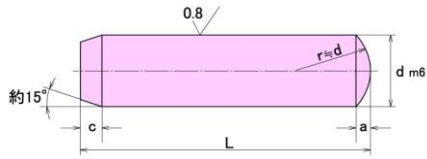

B種

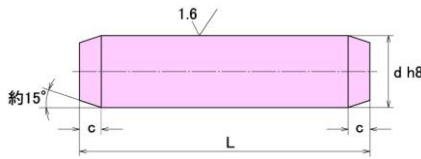

C種

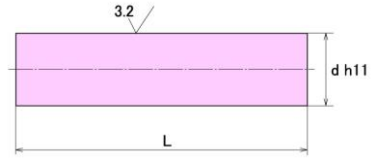


呼び径		0.6	0.8	1	1.2	1.5	1.6	2	2.5	3	4	5	6	8	10	12	13	16	20	25	30	40	50
d	基準寸法	0.6	0.8	1	1.2	1.5	1.6	2	2.5	3	4	5	6	8	10	12	13	16	20	25	30	40	50
	許容差	A種(m6)	+0.008										+0.012		+0.015		+0.018		+0.021		+0.025		
		B種(h8)	0										0		0		0		0		0		
		C種(h11)	-0.014										-0.018		-0.022		-0.027		-0.033		-0.039		
a	約	0.08	0.1	0.12	0.16	0.2	0.2	0.25	0.3	0.4	0.5	0.63	0.8	1	1.2	1.6	1.6	2	2.5	3	4	5	6.3
c	約	0.12	0.16	0.2	0.25	0.3	0.3	0.35	0.4	0.5	0.63	0.8	1.2	1.6	2	2.5	2.5	3	3.5	4	5	6.3	8


* JIS規格では、B種の許容差はh8とされていますが、弊社ではh7で在庫しています。

旧JIS規格

A形

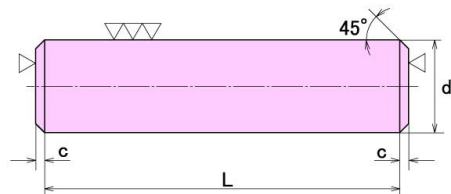

B形

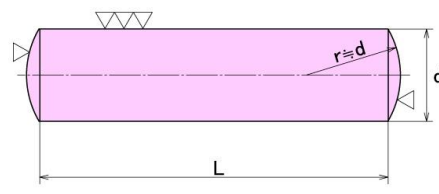

呼び径		1	1.2	1.5	1.6	2	2.5	3	4	5	6	8	10	12	13	16	20	25	30	40	50	
d	基準寸法	1	1.2	1.5	1.6	2	2.5	3	4	5	6	8	10	12	13	16	20	25	30	40	50	
	許容差	m6	+0.008										+0.012		+0.015		+0.018		+0.021		+0.025	
		h7	+0.002										+0.004		+0.006		+0.007		+0.008		+0.009	
c	約	0.2					0.4			1				1.5				3				

* 旧JIS規格でも製作可能です。詳しくはお問い合わせください。